

type no.:

P16LA V2 - 1ab □ □


RoHS
Compliant

CE


C **UL**®
US

10 D'E

Electrical Diagram

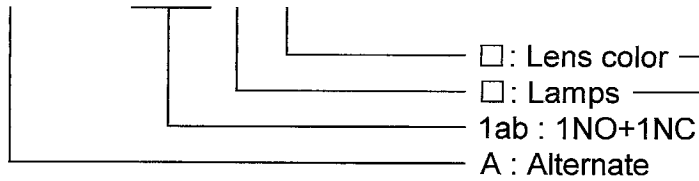

B : Blue
G : Green
O : Orange
R : Red
W : White
Y : Yellow




order no.:

P16LAV2-1ab □ □ / □ □ □ □

(Order no. codes)



0 : Without lamps
A : Incandescent 6V
AC/DC 200mA
B : Incandescent 14V
AC/DC 80mA
C : Incandescent 28V
AC/DC 40mA
F : Neon 110V/AC
G : Neon 220V/AC
H : LED 6V DC
J : LED 12V DC
K : LED 24V DC

Bottom View




Socket Type Pushbutton Switches

Dimensions

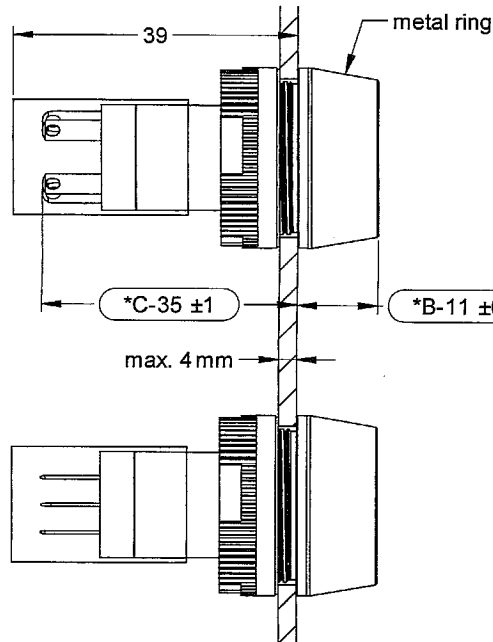

Hole Dia



Product Specifications

Mechanical lifetime : >1 million operations
Electric rating : 250V AC 5A(VDE) 125V AC 8A
250V DC 0.2A 24V DC 6A
Max. insulation voltage: >1300V 60Hz 1 minute between
all terminals
Motion tolerance : <20 operations / minute
Panel thickness : 0.5mm ~ 4mm
Degree of protection : IP 65
Storage temperature : -40°C to +85°C
Operating temperature: -25°C to +55°C
(-25°C to +70°C without lamp)
Contact resistance : ≤50mΩ (initial)

文件管制
SEP 25, 2013
文管中心

DECA® SwitchLab Inc.

DESIGNER: *Virgilio* CHECK: *Waldemar* APPROVE: *[Signature]*
DATE: 2013/9/25 DATE: 2013/9/25 DATE: 2013/9/25

PART NAME	UNIT	SCALE
Socket Type Pushbutton Switches	MM	
DRAWING NO.		SHEET
P16LAV2-1abxx		1 / 1