



type no.:  
P16LMV2-1ab □ □



Electrical Diagram

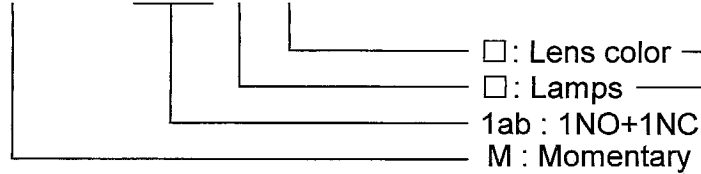

- B : Blue
- G : Green
- O : Orange
- R : Red
- W : White
- Y : Yellow



order no.: (Order no. codes)  
P16LMV2-1ab □ □ / □ □ □ □



- O : Without lamps
- A : Incandescent 6V AC/DC 200mA
- B : Incandescent 14V AC/DC 80mA
- C : Incandescent 28V AC/DC 40mA
- F : Neon 110V/AC
- G : Neon 220V/AC
- H : LED 6V DC
- J : LED 12V DC
- K : LED 24V DC

Bottom View




Socket Type Pushbutton Switches

Dimensions

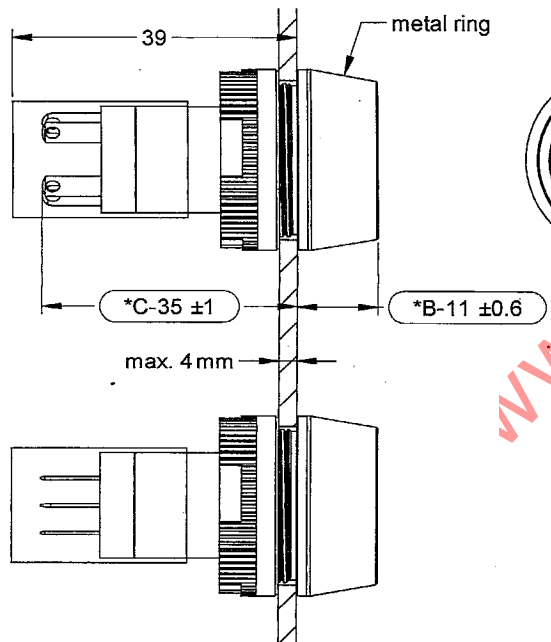

Hole Dia



Product Specifications

- Mechanical lifetime : >2 million operations
- Electric rating : 250V AC 5A(VDE) 125V AC 8A  
250V DC 0.2A 24V DC 6A
- Max. insulation voltage: >1300V 60Hz 1 minute between all terminals
- Motion tolerance : <30 operations / minute
- Panel thickness : 0.5mm ~ 4mm
- Degree of protection : IP 65
- Storage temperature : -40°C to +85°C
- Operating temperature: -25°C to +55°C  
(-25°C to +70°C without lamp)
- Contact resistance : ≤50mΩ (initial)

文件管制  
SEP 25. 2013  
文管中心

<b>DECA<sup>®</sup> SwitchLab Inc.</b>			PART NAME	UNIT	SCALE
			Socket Type Pushbutton Switches	MM	
DESIGNER <i>Wang</i>	CHECK <i>Wang</i>	APPROVE <i>Wang</i>	DRAWING NO.	SHEET	1 / 1
DATE 2013/9/25	DATE 2013/9/25	DATE 2013/9/25	P16LMV2-1abxx		

定案  
E  
REV.