

# C527





## DESCRIPTION

- . zinc alloy die cast housing and brass cylinder.
- . Bright chrome plated standard.
- . 7 pin tumbler mechanism.
- . Steel made tubular keys, nickel plated.
- . Key may be withdrawn in one or both positions.
- . Various cam configurations and rotations available.
- . Cam is affixed by nut.
- . Hex nut mounted.
- . All keyed alike or one combination per 100 pcs standard.
- . 5000 combinations available.

Unit: mm

Recommended hole size

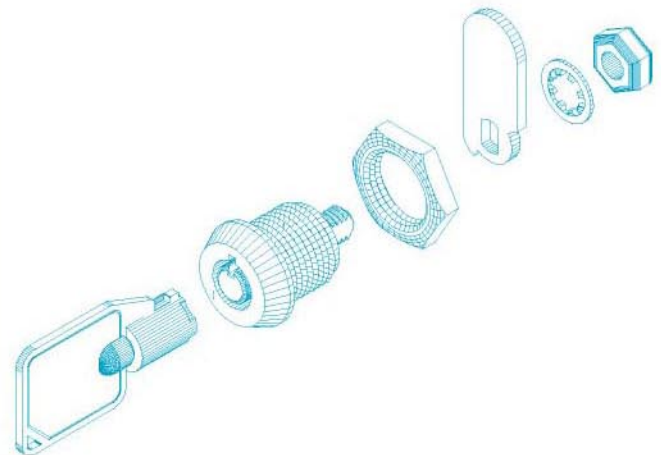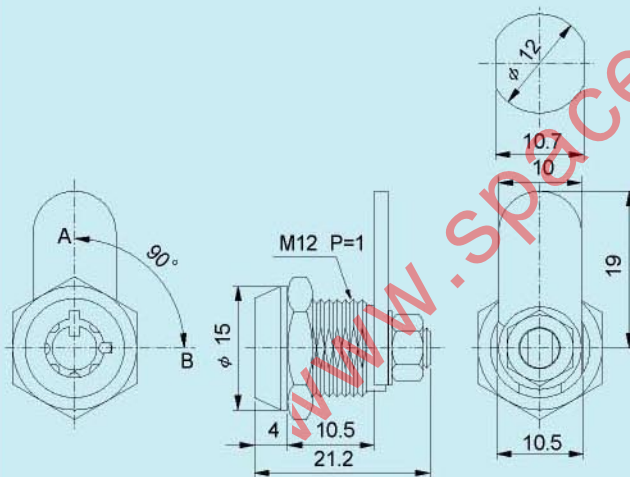

■ -INDICATES KEY-PULL

● -INDICATES NO KEY-PULL



Fig.1



Fig.2

Fig No	Lock Number	Positions	Key Pulls	Turn
1	C527-1	2	1	90°
2	C527-2	2	2	90°