

C620





DESCRIPTION

- . Zinc alloy die cast housing and cylinder.
- . Bright nickel plated standard.
- . 5 disc tumbler mechanism.
- . Brass keys, nickel plated.
- . Key may be withdrawn in one or both positions..
- . Various cam configurations and rotations available.
- . Cam is affixed by screw.
- . Hex nut or speed clip mounted.
- . All keyed alike or 25 combinations standard.
- . 100 combinations available.

Unit: mm

Recommended hole size

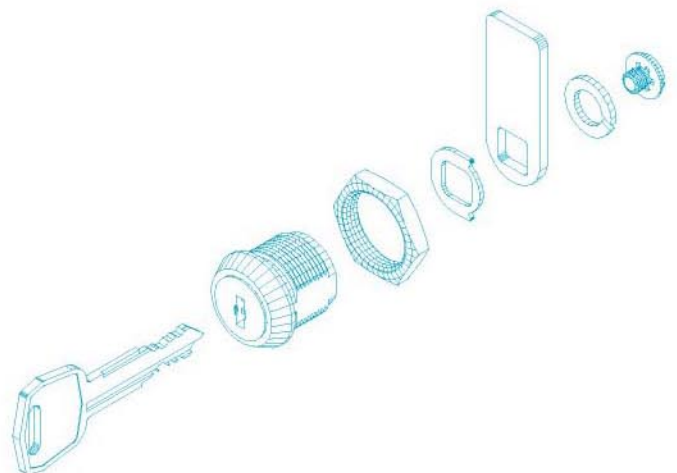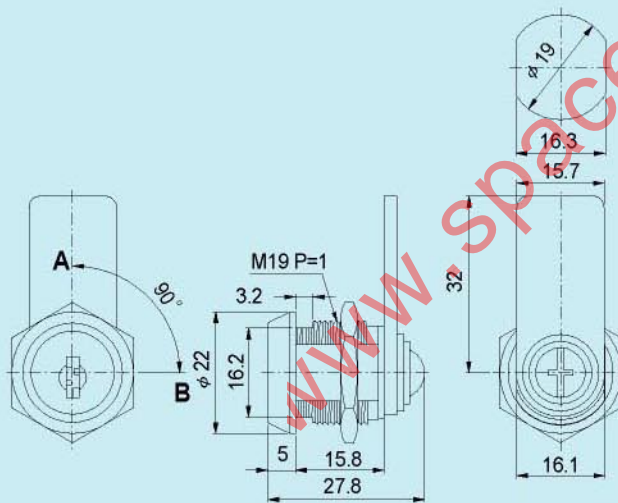

■ -INDICATES KEY-PULL

● -INDICATES NO KEY-PULL



Fig.1



Fig.2

Fig No	Lock Number	Positions	Key Pulls	Turn
1	C620-1	2	1	90°
2	C620-2	2	2	90°