


C680 Series



Unit: mm

Recommended hole size

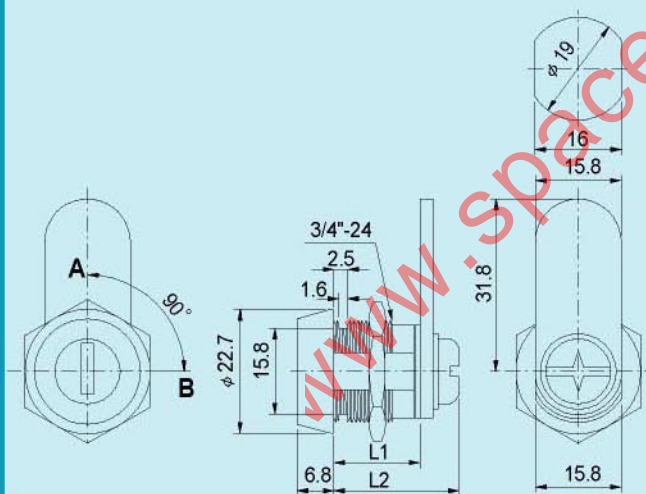

■ -INDICATES KEY-PULL

● -INDICATES NO KEY-PULL



Fig.1



Fig.2

Sizes	SCREW FIXED NUT			
	L1	L2	L2	L2
XS	11.1		14.5	21
S	15.9	23	19.2	
M	22.2	29.4	25.5	
L	28.6	35.4	31.6	
XL	35	42	38	

DESCRIPTION

- . Zinc alloy die cast housing and cylinder.
- . Stainless steel capped bezel with dust shutter mechanism.
- . Duplex chrome plated standard.
- . Internal 'O'-ring is standard except C680XS.
- . C680XS 4 disc tumbler mechanism, others 5 disc tumbler mechanism.
- . Reversible double-bitted brass keys, nickel plated.
- . Key may be withdrawn in one or both positions.
- . 5 sizes available.
- . Various cam configurations and rotations available.
- . C680XS cam is affixed by nut or fixed, others cam is affixed by screw or fixed.
- . Hex nut or speed clip mounted.
- . All keyed alike or 25 combinations standard.
- . 100 combinations available.
- . Master keyed design available.

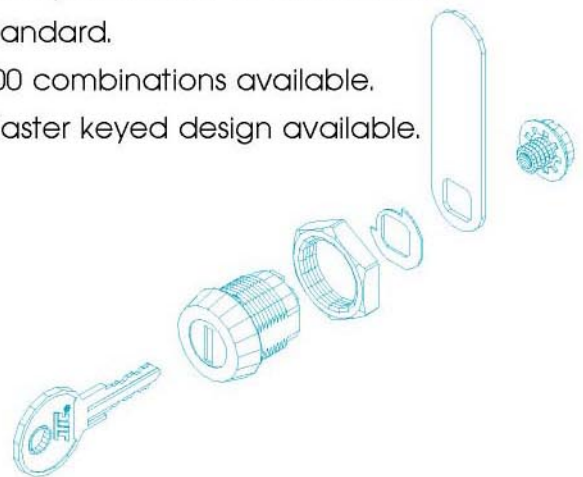


Fig No	Lock Number	Positions	Key Pulls	Turn
1	C680XS-1	2	1	90°
1	C680S-1	2	1	90°
1	C680M-1	2	1	90°
1	C680L-1	2	1	90°
1	C680XL-1	2	1	90°
2	C680XS-2	2	2	90°
2	C680S-2	2	2	90°
2	C680M-2	2	2	90°
2	C680L-2	2	2	90°
2	C680XL-2	2	2	90°