

開關構造說明 (Switch Construction Instructions)


照光緊急停止開關 (Illuminated Emergency Stop Switches)

A20

照光緊急停止開關操作部
(Illuminated Emergency Stop
Switches Operators)
Page.120



照光緊急停止開關 (Illuminated
Emergency Stop Switches)
Page.23

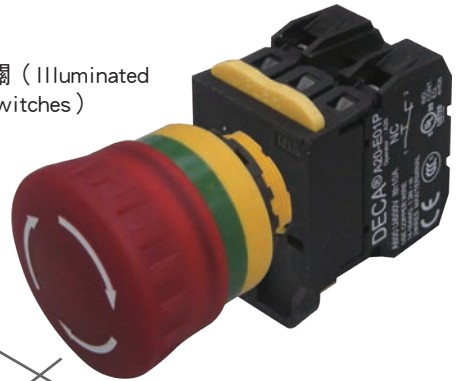

燈泡
(Lamp)
Page.141



開關接點部
(Contact Block
Assemblies)
Page.137-140



接點塊安裝轉接器
(Contact Block
Mounting Adapter)
Page.140



接點塊
(Contact Block)
Page.139



全電壓轉接器
(Full Voltage
Adapter)
Page.140



接點塊
(Contact Block)
Page.139



照光緊急停止開關 (Illuminated Emergency Stop Switches)


φ 40mm 蘑菇頭形 (Mushroom φ 40mm)



20L

燈泡 (Illumination Type)	動作類型 (Operation)	接點結構 (Contacts)	型號 (Type No.)	使用電壓記號③ (Operating Voltage Code ③)	顏色記號 (Lens Color Code)
無 (Without Lamp)	按鎖定拉出 或旋轉復歸 (Pushlock Pull/Turn Reset)	1NO	A20L-V4E10Q0R	0 (無燈泡) (Without Lamp) 最大(max.) 250V AC/DC	僅紅色 (Red only)
		1NC	A20L-V4E01Q0R		
		2NO	A20L-V4E20Q0R		
		2NC	A20L-V4E02Q0R		
		1NO-1NC	A20L-V4E11Q0R		
LED		1NO	A20L-V4E10Q③R	2 (6V AC/DC)	內置LED : LAED-③R (Built-in LED lamp)
		1NC	A20L-V4E01Q③R	3 (12V AC/DC)	
		2NO	A20L-V4E20Q③R	4 (24V AC/DC)	
		2NC	A20L-V4E02Q③R	H (110V AC/DC)	
		1NO-1NC	A20L-V4E11Q③R	M3 (230/240V AC/DC)	
白熾燈泡 (Incandescent)	1NO	A20L-V4E10Q③R	5 (6V AC/DC)	內置白熾燈泡 : LA-T③R (Built-in incandescent lamp)	
	1NC	A20L-V4E01Q③R	6 (12V AC/DC)		
	2NO	A20L-V4E20Q③R	7 (24V AC/DC)		
	2NC	A20L-V4E02Q③R			
	1NO-1NC	A20L-V4E11Q③R			

■外型尺寸(Dimensions) mm



面板厚度 (Panel Thickness)
0.8~6

